


TOTAL MAXIMUM DAILY LOAD FOR CHRONIC ALUMINUM ON WHITEWATER CREEK

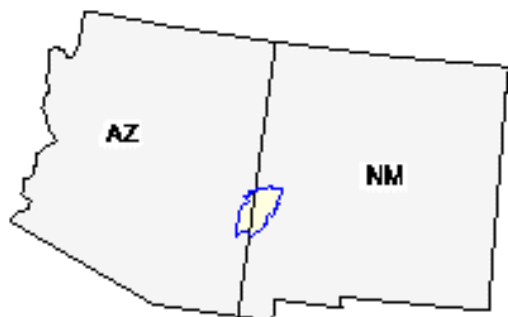

Summary Table

New Mexico Standards Segment	San Francisco River, 20.6.4.603 (formerly 2603)
Water body Identifier	Whitewater Creek from the mouth on the San Francisco River to Whitewater Campground, 5.6 mi.
Parameters of Concern	Metals (dissolved chronic aluminum)
Uses Affected	Fish culture and high quality coldwater fishery
Geographic Location	San Francisco River Basin (SFR4-20100)
Scope/size of Watershed	TMDL area: 52 mi ²
Land Type	Ecoregions: New Mexico/Arizona Mountains
Land Use/Cover	Forest (70 %), Rangeland (27%), Agriculture (3%), Water (<1 %), Built-up (<1%)
Identified Sources	Forest Management, Recreation, Natural
Watershed Ownership	Forest Service (97 %), Private (3 %)
Priority Ranking	1
Threatened and Endangered Species	Loach Minnow
TMDL for: Aluminum (chronic)	WLA (0) + LA (0.00376) + MOS (0.00094)= 0.0047 lbs/day

Table of Contents

List of Abbreviations	iv
Executive Summary	1
Background Information	2
Endpoint Identification	2
Target Loading Capacity	2
Figure 1. Lower San Francisco Watershed Land Use/Cover Map	3
Figure 2. Lower San Francisco Watershed Land Ownership Map	4
Flow	5
Calculations	5
Waste Load Allocations and Load Allocations	6
Waste Load Allocation (WLA)	6
Load Allocation (LA)	6
Identification and Description of Pollutant Sources	7
Linkage of Water Quality and Pollutant Sources	7
Margin of Safety (MOS)	9
Consideration of Seasonal Variation	9
Future Growth	9
Monitoring Plan	10
Implementation Plan	11
Management Measures	11
Introduction	11
Actions to be Taken	12
Other BMP Activities in the Watershed	17
Coordination	17
Timeline	18
Section 319(h) Funding Options	18
Assurances	19
Milestones	20

Public Participation	21
-----------------------------	-----------

Table of Contents (Cont'd)

References Cited	22
-------------------------	-----------

Appendices	23
-------------------	-----------

Appendix A: Conversion Factor Derivation for Whitewater Creek

Appendix B: Collection Data for the Determination of Measured Loads for Whitewater Creek

Appendix C: 4Q3 Determination for Whitewater Creek

Appendix D: Pollutant Source(s) Documentation Protocol for Whitewater Creek

Appendix E: Public Participation Process Flowchart for Whitewater Creek

Appendix F: Response to Comments for Whitewater Creek

List of Abbreviations

BMP	Best Management Practice
BLM	United States Department of Interior Bureau of Land Management
CCCG	Catron County Citizens Group
CFS	Cubic Feet per Second
CWA	Clean Water Act
CWAP	Clean Water Action Plan
CWF	Coldwater Fishery
EPA	United States Environmental Protection Agency
FS	United States Department of Agriculture Forest Service
GM	Gila Monster
GNF	Gila National Forest
HQCWF	High Quality Coldwater Fishery
LA	Load Allocation
MGD	Million Gallons per Day
mg/L	Milligrams per Liter
MOS	Margin of Safety
MOU	Memorandum of Understanding
NMAC	New Mexico Administrative Code
NMED	New Mexico Environment Department
NMSGF	New Mexico State Game and Fish
NMSHD	New Mexico State Highway and Transportation Department
NPDES	National Pollutant Discharge Elimination System
NPS	Nonpoint Source
SWQB	Surface Water Quality Bureau
TMDL	Total Maximum Daily Load
USGS	United States Geological Survey
UWA	Unified Watershed Assessment
WLA	Waste Load Allocation
WPS	Watershed Protection Section
WQLS	Water Quality Limited Segment
WQCC	New Mexico Water Quality Control Commission
WQS	Water Quality Standards
WRAS	Watershed Restoration Action Strategy

EXECUTIVE SUMMARY

Section 303(d) of the Federal Clean Water Act requires states to develop Total Maximum Daily Load (TMDL) management plans for waterbodies determined to be water quality limited. A TMDL documents the amount of a pollutant a waterbody can assimilate without violating a state's water quality standards. It also allocates that load capacity to known point sources and nonpoint sources at a given flow. TMDLs are defined in 40 CFR Part 130 as the sum of the individual Waste Load Allocations (WLA) for point sources and Load Allocations (LA) for nonpoint sources, including a margin of safety (MOS), and natural background conditions.



**Whitewater Creek looking downstream from the
Catwalk sampling site
(Photo taken March 14, 2001)**

The Whitewater Creek watershed is a sub-basin of the San Francisco River Basin, located in southwestern New Mexico. Two stations were located on the creek to evaluate the impact of the watershed and to establish background conditions. As a result of this monitoring effort, several exceedances of New Mexico water quality standards for dissolved aluminum were documented on Whitewater Creek. This TMDL document addresses dissolved aluminum for Whitewater Creek. When formally adopted by the New Mexico Water Quality Control Commission (WQCC), the TMDL will be incorporated into the State's Water Quality Management Plan by reference.

A general implementation plan for activities to be established in the watershed is referred to in this document. The Surface Water Quality Bureau (SWQB) Watershed Protection Section (WPS) will further develop the details of this plan. Implementation of recommendations in this document will be done with full participation of all interested and affected parties. During implementation, additional water quality data will be collected. As a result targets will be re-examined and potentially revised; this document is considered to be an evolving management plan. In the event that new data indicate that the targets used in this analysis are not appropriate or if new standards are adopted, the load capacity will be adjusted accordingly. When water quality standards have been achieved, the reach will be removed from the 303(d) list.

Background Information



**Whitewater Creek below the
Catwalk
(Photo taken March 14, 2001)**

The Whitewater Creek watershed is approximately 52 mi² and is located in southwestern New Mexico. The Whitewater Creek watershed is dominated by forest and rangeland, with some agriculture, water, and built-up areas (Figure 1). Whitewater Creek flows through the town of Glenwood and into the San Francisco River. The watershed is almost entirely Forest Service managed lands (97%), with very little privately held lands (3%) (Figure 2).

Surface water quality monitoring stations were used to characterize the water quality of the stream reaches. Stations were located to evaluate the impact on the stream and to establish background conditions. Several sample results from Whitewater Creek at the Catwalk exceed New Mexico water quality standards for chronic dissolved aluminum.

Endpoint Identification

Target Loading Capacity

Overall, the target values for this TMDL will be determined based on 1) the presence of numeric criteria, 2) the degree of experience in applying the indicator and 3) the ability to easily monitor and produce quantifiable and reproducible results. For this TMDL document target values for metals are based on numeric criteria. This TMDL is consistent with the State antidegradation policy.

Metals (dissolved aluminum)

According to the New Mexico water quality standards (20.6.4.900.J NMAC) the State's standard leading to an assessment of use impairment is the numeric criteria stating that "chronic dissolved aluminum shall not exceed 87 ug/L" and "acute dissolved aluminum shall not exceed 750 ug/L" for all subcategories of fisheries.

Although there are no adverse affects to biota at acute levels of 750 ug/L, or chronic levels of 87 ug/L, high chronic levels of dissolved aluminum are toxic to fish, benthic invertebrates, and some single-celled plants. Chronic dissolved aluminum concentrations from 100 to 300 ug/L increases mortality, and retards growth, gonadal development, and egg production of fish (<http://h2osparc.wq.ncsu.edu>).

Figure 1

**Lower San Francisco River Basin
Land Use/Cover
6th code Watersheds**

<u>HUC 5 NAME</u>		
Whitewater/San Francisco		
<u>HUC</u>	<u>ACRES</u>	<u>MI²</u>
4040060	34,092	53.27
4040070	21,451	<u>33.52</u> 86.79


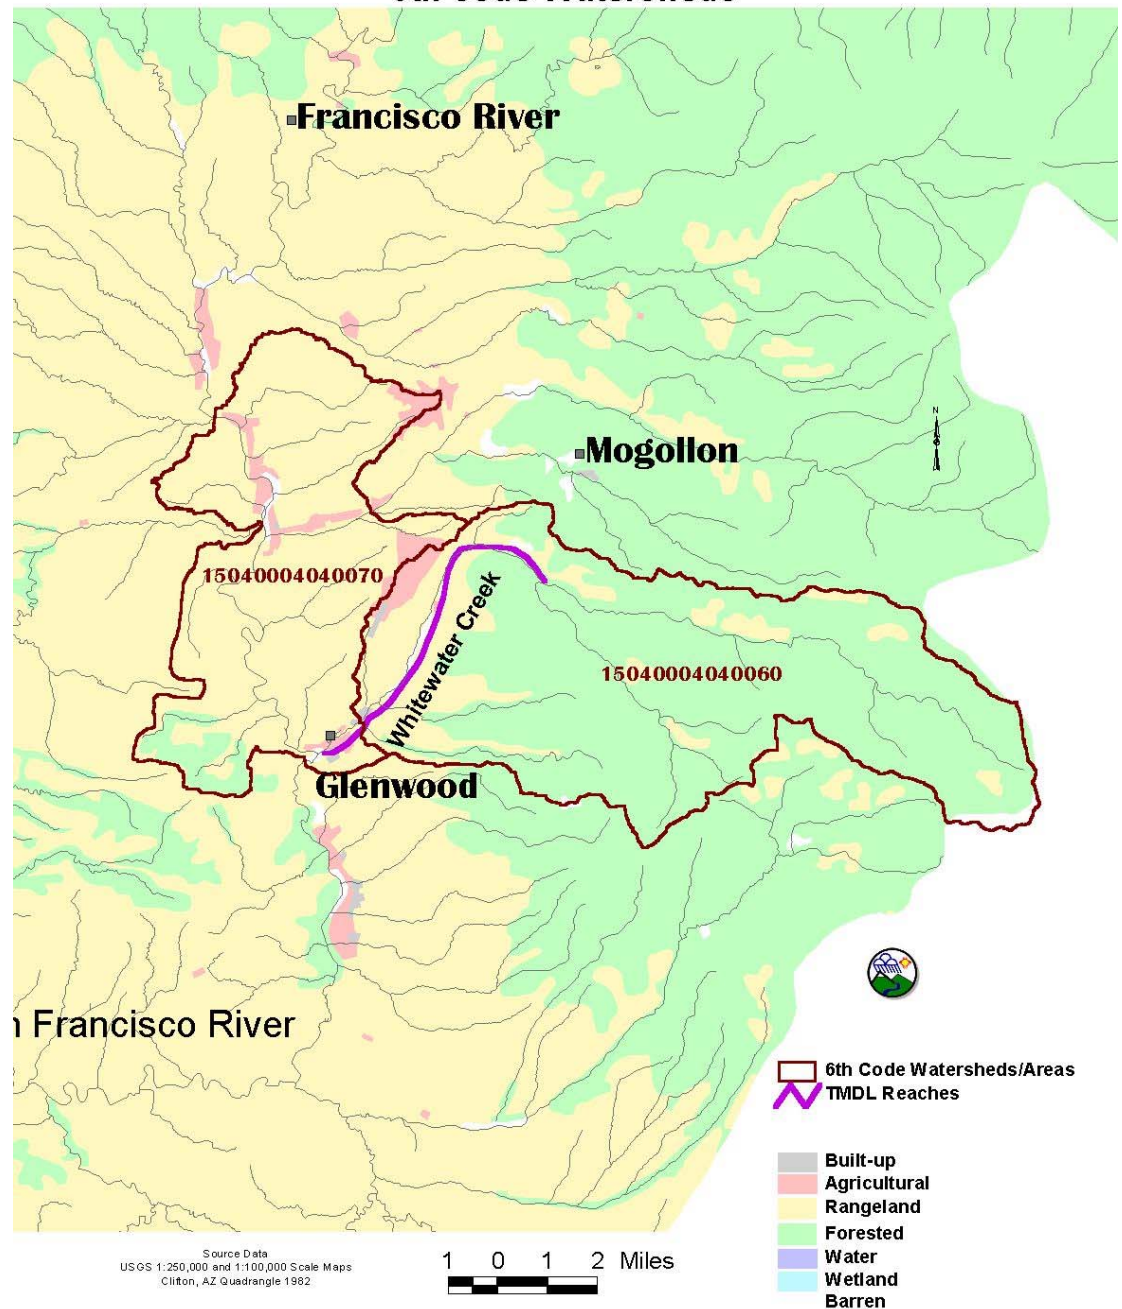


Figure 2

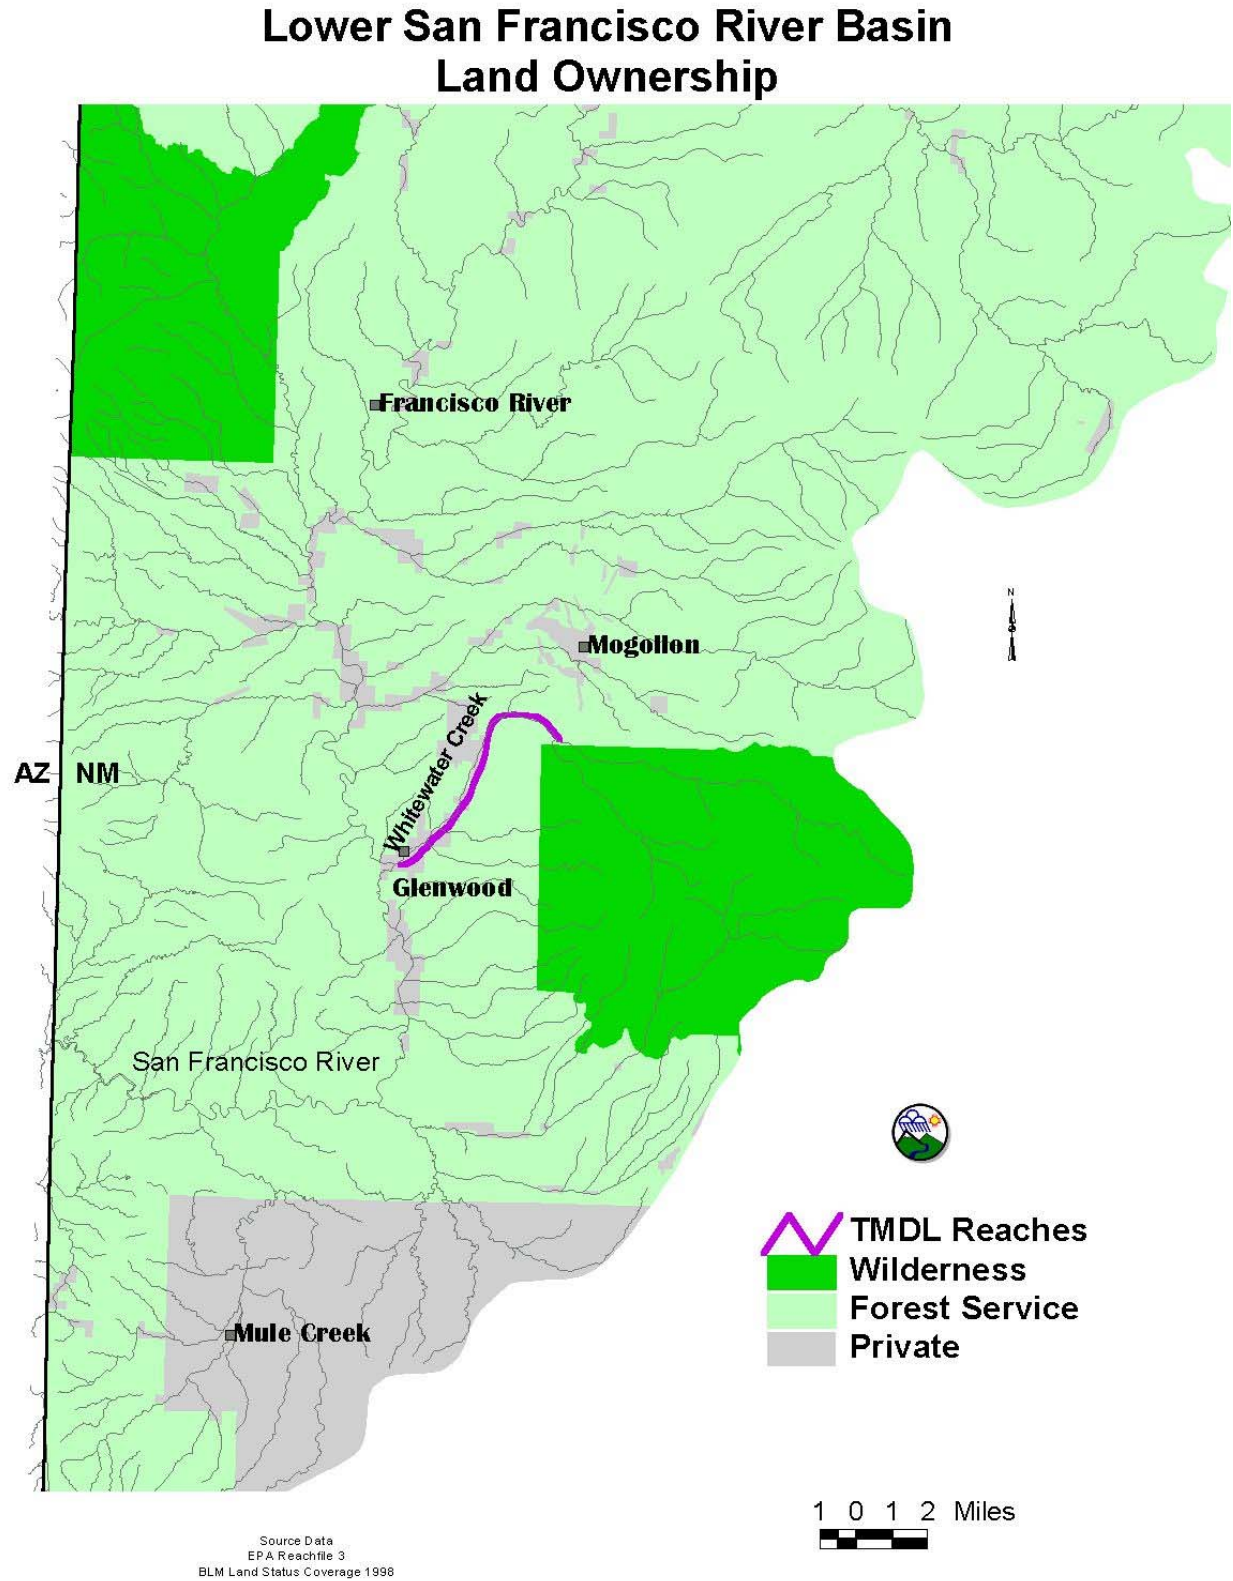

Exceedances of the chronic and acute numeric criteria for dissolved aluminum were observed during the summer and fall of 1996 and summer of 1999. These exceedances resulted in the listing of Whitewater Creek for metals (chronic aluminum), and the drafting of this TMDL document. To be conservative, this TMDL was drafted for compliance with the chronic aluminum criterion, which will also result in compliance with the acute numeric criterion.

Flow

Metals concentrations in a stream vary as a function of flow. In this case the target flow was critical low flow. Exceedances of the criterion were seen in the summer and fall months at lower flows.

When available, United States Geological Survey (USGS) gages are used to estimate flow. Where gages are absent or poorly located along a reach, either actual flow (measured as water quality samples are taken) is used as target flows or geomorphologic sectional information is taken to model the flows. In this case, 1) there was no USGS gage for Whitewater Creek, 2) the critical flow was modeled and 3) the presence of dissolved aluminum can vary in a stream as a function of flow. Thus, a TMDL is calculated for each reach at a particular flow. The flow value used to calculate the TMDL for dissolved aluminum on Whitewater Creek obtained using the 4-day, 3-year low flow frequency 4Q3 regression model. The New Mexico Surface Water Quality Standards (20.6.4 NMAC) describe critical low flow using the term 4Q3. The 4Q3 is the minimum arithmetic average four-consecutive-day flow, which occurs with a frequency of once in three years. This flow is used in calculation of point source (NPDES) permit wasteload allocations (WLA) and in the development of total maximum daily loads (TMDLs).

It is important to remember that the TMDL is a planning tool to be used to achieve water quality standards. Since flows vary throughout the year in these systems at water quality standards the target load will vary based on the changing flow. Management of the load should set a goal of water quality standards attainment, not of meeting the calculated target load.

Calculations

A target load for dissolved aluminum is calculated based on a flow, the current water quality standards, and a unitless conversion factor, 8.34 that is used to convert mg/L units to lbs/day (see Appendix A for Conversion Factor Derivation). The target loads (TMDLs) predicted to attain standards were calculated using Equation 2 and are shown in Table 1.

Equation 2. critical flow (mgd) x standard (mg/L) x 8.34 (conversion factor) = target loading capacity

Table 1: Calculation of Target Loads

Location □	Flow⁺ (mgd)	Standard Chronic Al (mg/L)	Conversion Factor	Target Load Capacity (lbs/day)
Whitewater Creek	0.0065	0.087	8.34	0.0047 lb/day

+Because there is no USGS station on this reach, the flow is the 4Q3 flow of 0.01 cfs, which converts to 0.0065 mgd. See Appendix C for derivation.

The measured loads were calculated using Equation 2. The flows used were taken from the critical low flow, 4Q3 determination. The geometric mean of the data that exceeded the standards from the data collected at each site for dissolved aluminum was substituted for the standard in Equation 2. The same conversion factor of 8.34 was used. Results are presented in Table 2.

Table 2: Calculation of Measured Loads

Location	Flow⁺ (mgd)	Field Measurements* (mg/L)	Conversion Factor	Measured Load (lbs/day)
Whitewater Creek	0.0065	0.147	8.34	0.00797

+Because there is no USGS station on this reach, the flow is the 4Q3 flow of 0.01cfs, which converts to 0.0065 mgd. See Appendix C for derivation

* Measurements are the geometric mean of the exceedances seen over the three season sampling regime, Appendix B.

It was not possible to calculate background loads in this watershed. A reference reach, with similar stream channel morphology and flow was not identified. It is assumed that a portion of the load allocation is made up of natural background loads. In future water quality surveys, finding a suitable reference reach will be a priority.

Waste Load Allocations and Load Allocations

Waste Load Allocation

There are no point source contributions associated with this TMDL. The waste load allocation is zero.

Load Allocation

In order to calculate the load allocation (LA) the waste load allocation (WLA), and margin of safety (MOS) were subtracted from the target capacity (TMDL) following Equation 2.

$$\text{Equation 3. } WLA + LA + MOS = TMDL$$

Results are presented in Table 3.

Table 3: Calculation of TMDL for Chronic Aluminum

Location	WLA (lbs/day)	LA (lbs/day)	MOS (20%) (lbs/day)	TMDL (lbs/day)
Whitewater Creek	0	0.00376	0.00094	0.0047

The load reduction that would be necessary to meet the target loads were calculated to be the difference between the target load (Table 1) and the measured load (Table 2) as shown in Table 4 (Calculation of Load Reductions). For example, for Whitewater Creek, achieving the target load of 0.0047 lbs/day would require a load reduction of 0.00327 lbs/day. Achieving the target load for dissolved aluminum on Whitewater Creek would require a load reduction of approximately 59%.

Table 4: Calculation of Load Reductions (in lbs/day)

Location	Target Load	Measured Load	Load Reduction
Whitewater Creek	0.0047	0.00797	0.00327

Identification and Description of Pollutant Sources

Table 5: Pollutant Source Summary

Pollutant Sources (% from each)	Magnitude (WLA + LA + MOS)	Location	Potential Sources
<u>Point</u> : 0%	0	-----	None
<u>Nonpoint</u> : 100% Dissolved Aluminum	0.0047	Whitewater Creek	Forest Management, Recreation, Natural

Linkage of Water Quality and Pollutant Sources

Where available data are incomplete or where the level of uncertainty in the characterization of sources is large, the recommended approach to TMDLs requires the development of allocations based on estimates utilizing the best available information. Data that were collected and used for the calculation of the existing condition for Whitewater Creek, with respect to dissolved aluminum, are included in Appendix B.

The over story within a typical sub-watershed, can contribute conifer needles and other organic debris, possibly reaching an exposed mineral body.

Generally exposed surfaces are relatively low in metallic cation concentration and, on decomposition of deposited organics, can give rise to acid products. As the acids generated in the organic layer are moved downward, by percolating water, into the mineral body below, the acids produced can dissolve the alkaline earth carbonates (lime such as calcite and dolomite) along with other soluble salts which then move downward in solution. Once carbonates have been removed from an exposed geologic body, the hydrogen ions of percolating acid-waters replace many of the metallic cations on the cation exchange complex (Positively charged cations can exchange for each other on the surface of the negatively charged clay particles.). The metallic cations move downward in solution, and the upper part of the mineral body becomes acid. Under acid conditions, many iron and aluminum compounds are unstable. Minerals containing these compounds break down.

The iron and aluminum oxides are carried downward. Since quartz is fairly stable under acid conditions, it remains behind as a residue in the upper part of the mineral body. During intermediate stages, quartz may form just a residual coating of mineral particles, as the particles are weathering and losing iron, aluminum and other less resistant materials (Hovland, Dwight, 1997).

SWQB fieldwork includes an assessment of the potential sources of impairment (SWQB/NMED revised 10/2/00). The Pollutant Source(s) Documentation Protocol, shown as Appendix D, provides an approach for a visual analysis of a pollutant source along an impaired reach. Although this procedure is subjective, SWQB feels that it provides the best available information for the identification of potential sources of impairment in this watershed. Table 5 (Pollutant Source Summary) identifies and quantifies potential sources of nonpoint source impairments along each reach as determined by field reconnaissance and assessment. A further explanation of the sources follows.

Whitewater Creek

The primary sources of impairment for the perennial reach of Whitewater Creek above the Catwalk are Forest Management, Recreation, and Natural. Some of the impairment indicated by chronic aluminum exceedances appear to be caused by past forest management practices and policies related to fire suppression and grazing. These historic activities may be responsible for watershed-wide changes in erosion rates, storm water runoff, and sediment transport characteristics due to fundamental changes in the vegetative state of the watershed.

Recreational activities presently occurring above the Catwalk site constitute a source of impairment associated with current land management practices and policies. Another primary source of chronic aluminum is natural and derives from the erosion of alumino-silicate rocks that dominate the lithology of the watershed.

There are subdivisions, houses, ranches/farms, bridges, roads, and low water crossings within the segment. Parts of this segment of Whitewater Creek are not perennial. The land surrounding this creek is almost entirely Forest Service managed lands with very little privately owned land.

Margin of Safety (MOS)

TMDLs should reflect a margin of safety based on the uncertainty or variability in the data, the point and nonpoint source load estimates, and the modeling analysis. For this TMDL, there will be no margin of safety for point sources, since there are none. However, for the nonpoint sources the margin of safety is estimated to be an addition of **20%** for Whitewater Creek for dissolved aluminum to the TMDL, excluding the background. This margin of safety incorporates several factors:



Whitewater Creek looking upstream from the 1998-1999 sampling station “Whitewater Creek at Catwalk”. Most of the watershed is located above this site and consists of national forest and wilderness

(Photo taken March 14, 2001)

Errors in calculating NPS loads

A level of uncertainty exists in sampling nonpoint sources of pollution. Analytical techniques used

for measuring metals concentrations in stream water are accurate to within +/- 15%. Accordingly, a conservative margin of safety for metals increases the TMDL by **15%**.

Errors in calculating flow

Flow estimates were based on a modeled flow. To be conservative, an addition of **5% MOS** to account for accuracy of flow measures will be included.

Consideration of Seasonal Variation

Data used in the calculation of this TMDL were collected during spring, summer, and fall in order to ensure coverage of any potential seasonal variation in the system. Critical condition is set to the lowest critical flow for metals. Low flow was chosen as the critical flow as there is more potential to have higher concentrations of metals in the stream during summer and early fall. Data where exceedances were seen were used in the calculation of the measured loads.

Future Growth

Future growth and growth estimates are of interest to Western New Mexico University (WNMU), who in cooperation with other groups and agencies, has produced documentation pertaining to socio-economic studies of the southwestern counties in an attempt to better understand trends.

Estimations of future growth are not anticipated to lead to a significant increase for dissolved aluminum that cannot be controlled with best management practice implementation in this watershed. Whitewater Creek runs through almost entirely Forest Service managed lands with very little privately held lands.

Monitoring Plan

Pursuant to Section 106(e)(1) of the Federal Clean Water Act, the SWQB has established appropriate monitoring methods, systems and procedures in order to compile and analyze data on the quality of the surface waters of New Mexico. In accordance with the New Mexico Water Quality Act, the SWQB has developed and implemented a comprehensive water quality monitoring strategy for the surface waters of the State. The monitoring strategy establishes the methods of identifying and prioritizing water quality data needs, specifies procedures for acquiring and managing water quality data, and describes how these data are used to progress toward three basic monitoring objectives: to develop water quality-based controls, to evaluate the effectiveness of such controls and to conduct water quality assessments.

The SWQB utilizes a rotating basin system approach to water quality monitoring. In this system, a select number of watersheds are intensively monitored each year with an established return frequency of every five to seven years.

The SWQB maintains current quality assurance and quality control plans to cover all monitoring activities. This document, "Quality Assurance Project Plan for Water Quality Management Programs" (QAPP) is updated annually (SWQB/NMED 2001). Current priorities for monitoring in the SWQB are driven by the 303(d) list of streams requiring TMDLs. Short-term efforts will be directed toward those waters which are on the EPA TMDL consent decree (Forest Guardians and Southwest Environmental Center v. Carol Browner, Administrator, US EPA, Civil Action 96-0826 LH/LFG, 1997) list and which are due within the first two years of the monitoring schedule. Once assessment monitoring is completed those reaches showing impacts and requiring a TMDL will be targeted for more intensive monitoring. The methods of data acquisition include fixed-station monitoring, intensive surveys of priority water bodies, including biological assessments, and compliance monitoring of industrial, federal and municipal dischargers, and are specified in the SWQB Assessment Protocol (SWQB/NMED revised 2000).

Long term monitoring for assessments will be accomplished through the establishment of sampling sites that are representative of the waterbody and which can be revisited every five to seven years. This gives an unbiased assessment of the waterbody and establishes a long term monitoring record for simple trend analyses. This information will provide time-relevant information for use in 305(b) assessments and to support the need for developing TMDLs.

The approach provides:

- a systematic, detailed review of water quality data, allowing for a more efficient use of valuable monitoring resources;
- information at a scale where implementation of corrective activities is feasible;

- an established order of rotation and predictable sampling in each basin which allows for enhanced coordinated efforts with other programs; and
- program efficiency and improvements in the basis for management decisions.

It should be noted that a basin would not be ignored during its sampling hiatus. The rotating basin program will be supplemented with other data collection efforts. Data will be analyzed, field studies will be conducted to further characterize acknowledged problems, and TMDLs will be developed and implemented. Both long term and field studies can contribute to the 305(b) report and 303(d) listing processes.

The following schedule is a draft for the sampling seasons through 2004 and will be followed in a consistent manner to support the New Mexico Unified Watershed Assessment (UWA) and the Nonpoint Source Management Program. This sampling regime allows characterization of seasonal variation and through sampling in spring, summer, and fall for each of the watersheds.

- 1998 Jemez Watershed, Upper Chama Watershed (above El Vado), Cimarron Watershed, Santa Fe River, San Francisco Watershed
- 1999 Lower Chama Watershed, Red River Watershed, Middle Rio Grande, Gila River Watershed (summer and fall), Santa Fe River
- 2000 Gila River Watershed (spring), Dry Cimarron Watershed, Upper Rio Grande 1 (Pilar north to the NM/CO border), Shumway Arroyo
- 2001 Upper Rio Grande 2 (Pilar south to Cochiti Reservoir), Upper Pecos Watershed (Ft Sumner north to the headwaters)
- 2002 Canadian River Watershed, San Juan River Watershed, Mimbres Watershed
- 2003 Lower Pecos Watershed (Ft. Sumner south to the NM/TX border including Ruidoso), Lower Rio Grande (southern border of Isleta Pueblo south to the NM/TX border)
- 2004 Rio Puerco Watershed, Closed Basins, Zuni Watershed

Implementation Plan

Management Measures

Management measures are “economically achievable measures for the control of the addition of pollutants from existing and new categories and classes of nonpoint sources of pollution, which reflect the greatest degree of pollutant reduction achievable through the application of the best available nonpoint pollution control practices, technologies, processes, citing criteria, operating methods, or other alternatives”(USEPA, 1993). A combination of best management practices (BMPs) will be used to implement this TMDL.

Introduction

The uptake and transport of metals in surface waters can pose a considerable nonpoint source pollution problem.

Metals such as aluminum, lead, copper, iron, zinc and others can occur naturally in watersheds in amounts ranging from trace to highly mineralized deposits. Some metals are essential to life at low concentrations but are toxic at higher concentrations. Metals such as cadmium, lead, mercury, nickel, and beryllium represent known hazards to human health. The metals are continually released into the aquatic environment through natural processes, including weathering of rocks, landscape erosion, geothermal or volcanic activity. The metals may be introduced into a waterway via headcuts, gullies or roads.

Depending on the characteristics of the metal, it can be dissolved in water, deposited in the sediments or both. Metals become dissolved metals in water as a function of the pH of a water system. In urban settings, storm water runoff can increase the mobilization of many metals into streams.

Examples of sources that can cause metals contamination:

- Activities such as resource extraction, recreation, some agricultural activities and erosion can contribute to nonpoint source pollution of surface water by metals.
- Storm water runoff in industrial areas may have elevated metals in both sediments and the water column.

Actions to be Taken

For this watershed the primary focus will be on the control of dissolved aluminum. On this watershed the primary focus will be on the control of dissolved aluminum listed in the CWA §303(d) report as exceeding the State of New Mexico Standards for Interstate and Intrastate Surface Waters.

During the TMDL process in this watershed, point sources have been reviewed and will be addressed through the permit process. The nonpoint source contributions will need to address aluminum exceedances through BMP implementation. In addition, sediment loads may need to be addressed.

BMPs can be implemented to address and remediate metal contamination. They include, but are not limited to:

1. Wetlands are used to filter runoff water and sediment from source areas in the watershed. Metals may be bound up in the root systems of wetlands vegetation, preventing them from entering a waterway. (The Use of Wetlands for Improving Water Quality to Meet Established Standards, 1992, Filas and Wildeman.)
2. Improving the pH in a stream. Neutral to alkaline pH waters will generally not pose a metal exceedance problem. An acidic pH will dissolve available metals.

In such a case, a remedy for metals contamination could be an adjustment of the pH of runoff before it enters the water body.

An approach may be the construction of an anoxic alkaline drain to raise the pH and

precipitate the contained metals.

An anoxic alkaline drain is constructed by placing a high pH material in a trench between runoff and the stream to be used as a buffer (Red River Groundwater Investigation- NMED-SWQB-Nonpoint Source Pollution Section, 1996, D. Slifer).

3. A method for reducing metals used in controlled situations includes the use of sulfate and sulfate reducing bacteria. The sulfate, (if not already present), and the sulfate reducing bacteria are applied into the water column. This provides a mechanism for some metals to precipitate out of solution. (A Treatment of Acid Mine Water Using Sulfate-Reducing Bacteria, 1979, Wakao, Saurai, and Shiota).
4. Storm water and construction BMPs can be used to divert flows off metal-producing areas directing them away from streams into areas where the flows may infiltrate, evaporate, or accumulate in sediment retention basins.

(Conservation Design for Stormwater Management: A Design Approach to Reduce Stormwater Impacts from Land Development and Achieve Multiple Objectives Related to Land Use, 1997, Delaware Department of Natural Resources and Environmental Control, Sediment and Stormwater Program & the Environment Management Center, Brandywine Conservancy.

Additional sources of information for BMPs to address metals are listed below. Some of these documents are available for viewing at the New Mexico Environment Department, Surface Water Quality Bureau, Watershed Protection Section Library, 1190 St. Francis Drive, Santa Fe, New Mexico.

Mining

Internet websites:

- <http://www.epa.gov/region2/epd/98139.htm>
- <http://www.epa.gov/OSWRCRA/hazwast/ldr/mining/docs/hhed1196.pdf>
- Caruso, B.S., and R. Ward, 1998, Assessment of Nonpoint Source Pollution from Inactive Mines Using a Watershed Based Approach, Environmental Management, vol.22, No.2, Springer-Verlag New York Inc. pp.225-243.
- Cohen, R.R.H., and S. W. Staub, 1992, Technical Manual for the Design and Operation of a Passive Mine Drainage Treatment System. U.S. Bureau of Land Management and U.S. Bureau of Reclamation, Denver, CO.

- Coleman, M.W., 1996, Anoxic Alkaline Treatment of Acidic, Metal-Loaded Seeps Entering the Red River, Taos Co., NM. Paper presented at New Mexico Governor's 1996 Conference on the Environment, Albuquerque Convention Center, abstract in program. Published in New Mexico Environment Department-NonPoint Source newsletter "Clearing the Waters", v.3, No.1, summer, Santa Fe.
- Coleman, M.W., 1999, Geology-Based Analysis of Elevated Aluminum in the Jemez River, North-Central New Mexico. Unpublished Report to USEPA Region 6, New Mexico Total Maximum Daily Load (TMDL) Team, New Mexico Environment Department Surface Water Quality Bureau, Santa Fe, 2p.
- Coleman, M.W., 2000, Rio Puerco Watershed Mining Impacts. New Mexico Environment Department, Clean Water Act (CWA) Section 319(h) Grant Project Summary Report to USEPA Region 6 Dallas, New Mexico Environment Department Surface Water Quality Bureau Watershed Protection Section, Santa Fe.
- Eger, P., and K. Lapakko, 1988, Nickel and Copper Removal From Mine Drainage by a Natural Wetland. U.S. Bureau of Mines Circular 9183. pp.301-309.
- Filas, B., and T. Wildeman, 1992, The Use of Wetlands for Improving Water Quality to Meet Established Standards, Nevada Mining Association Annual Reclamation Conference, Sparks, Nevada.
- Girts, M.A., and R.L.P. Kleinmann, 1986, Constructed Wetlands for Treatment of Mine Water. American Institute of Mining Engineers Fall Meeting. St. Louis, Missouri.
- Holm, J.D., and T. Elmore, 1986, Passive Mine Drainage Treatment Using Artificial and Natural Wetlands. Proceedings of the High Altitude Revegetation Workshop, No. 7. pp. 41-48.
- Kleinmann, R.L.P., 1989, Acid Mine Drainage: U.S. Bureau of Mines, Research and Developments, Controlling Methods for Both Coal and Metal Mines. Engineering Mining Journal 190:16i-n.
- Machemer, S.D., 1992, Measurements and Modeling of the Chemical Processes in a Constructed Wetland Built to Treat Acid Mine Drainage. Colorado School of Mines Thesis T-4074, Golden, CO.
- Metish, J.J. and others, 1998, Treating Acid Mine Drainage From Abandoned Mines in Remote Areas. USDA Forest Service Technology and Development Program, AMD Study 7E72G71, Missoula, MT, US Govt. Printing Office: 1998-789-283/15001.

- Royer, M.D., and L. Smith, 1995, Contaminants and Remedial Options at Selected Metal-Contaminated Sites: Battelle Memorial Institute-Columbus Division, under contract # 68-CO-0003-WA41 to Natl. Risk Management Lab-Office of Research and Development, USEPA. EPA/540/R-95/512.
- Slifer, D.W., 1996, Red River Groundwater Investigation- New Mexico Environment Department Surface Water Quality Bureau Nonpoint Source Pollution Section; CWA Section 319 (h) Grant Project Final Report to USEPA Region 6 - Dallas.
- US EPA, 1996, Seminar Publication Managing Environmental Problems at Inactive and Abandoned Metals Mine Sites, Office of Research and Development, EPA/625/R-95/007.
- Wakao, N., T. Takahashi, Y. Saurai, and H. Shiota. 1979. A Treatment of Acid Mine Water Using Sulfate-reducing Bacteria. Journal of Ferment. Technology 57(5):445-452.

Riparian and Streambank Stabilization

- Colorado Department of Natural Resources, Streambank Protection Alternatives, State Soil Conservation Board.
- Meyer, Mary Elizabeth, 1989, A Low Cost Brush Deflection System for Bank Stabilization and Revegetation.
- Missouri Department of Conservation, Restoring Stream Banks With Willows, (pamphlet).
- New Mexico State University, Revegetating Southwest Riparian Areas, College of Agriculture and Home Economics, Cooperative Extension Service, (pamphlet).
- State of Pennsylvania Department of Environmental Resources, 1986, A Streambank Stabilization And Management Guide for Pennsylvania Landowners, Division of Scenic Rivers.
- State of Tennessee, 1995, Riparian Restoration and Streamside Erosion Control Handbook, Nonpoint Source Water Pollution Management Program.

Storm Water

Internet website

<http://www.epa.gov/ordntrnt/ORD/WebPubs/nctuw/Pitt.pdf>

- Brede, A.D., L.M. Cargill, D.P. Montgomery, and T.J. Samples, 1987, Roadside Development and Erosion Control. Oklahoma Department of Transportation, Report No. FHWA/OK 87 (5).
- Delaware Department of Natural Resources and Environmental Control, 1997, Conservation Design for Storm water Management: A Design Approach to Reduce Storm water Impacts from Land Development and Achieve Multiple Objectives Related to Land Use. Sediment and Storm water Program & the Environment Management Center, Brandywine Conservancy.
- Taylor, Scott, and G. Fred Lee, 2000, Storm water Runoff Water Quality Science/Engineering Newsletter, Urban Storm water Runoff Water Quality Management Issues, Vol. 3, No. 2. May 19.

Miscellaneous

Internet website

<http://www.epa.gov/OWOW/NPS>

- Constructed Wetlands Bibliography,
[http://www.nal.usda.gov/wqic/Constructed Wetlands all/index.html](http://www.nal.usda.gov/wqic/Constructed_Wetlands_all/index.html)
- New Mexico Environment Department, 2000, A Guide to Successful Watershed Health, Surface Water Quality Bureau.
- Roley, William Jr., Watershed Management and Sediment Control for Ecological Restoration.
- Rosgen, D., 1996, Applied River Morphology; Chapter 8. Applications (Grazing, Fish Habitat).
- State of Tennessee Nonpoint Source Water Pollution Management Program, 1995, Riparian Restoration and Streamside Erosion Control Handbook.
- The Federal Interagency Stream Restoration Working Group, 1998, Stream Corridor Restoration. Principles, Processes, and Practices; Chapter 8 – Restoration Design; Chapter 9 – Restoration implementation, Monitoring, and Management.
- USDA Forest Service Southwestern Region, Soil and Water Conservation Practices Handbook

Section 23, Recreation Management

Section 25, Watershed Management

Section 41, Access and Transportation Systems and Facilities

- US EPA, 1993, Guidance Specifying Management Measures For Sources of Nonpoint Pollution in Coastal Waters. Office of Water, Coastal Zone Act Reauthorization Amendments of 1990. EPA840-B-92-002
- Interagency Baer Team, 2000, Cerro Grande Fire Burned Area Emergency Rehabilitation (BAER) Plan, Section F. Specifications.
- Unknown; Selecting BMPs and other Pollution Control Measures.
- Unknown; Environmental Management. Best Management Practices.

Construction Sites
 Developed Areas
 Sand and Gravel Pits
 Farms, Golf Courses, and Lawns

Other BMP Activities in the Watershed

The following are activities in this watershed that have occurred, are occurring, or are in the planning stages to address dissolved aluminum sources or other nonpoint source issues in the Whitewater Creek watershed.

The Gila National Forest has been and continues to be involved in management activities on lands in the upper reaches of the Whitewater Creek watershed. Many of these management activities are undertaken to address issues with sediment, metals transport, turbidity, and water temperature. Mining, grazing and logging were all historic uses made of the land. Currently, the Whitewater Creek watershed is managed with an emphasis focused on recreation, wildlife, fisheries and grazing. Recreational developments consist of the Catwalk at Glenwood, Glenwood Fish Hatchery and local development. There are many established trails above and below this segment.

Coordination

In this watershed public awareness and involvement will be crucial to the successful implementation of this plan and improved water quality.

Staff from the SWQB is available to work with stakeholders to provide the guidance in developing the Watershed Restoration Action Strategy (WRAS). The WRAS is a written plan intended to provide a long-range vision for various activities and management of resources in a watershed. It includes opportunities for private landowners and public agencies to reduce and prevent impacts to water quality.

This long-range strategy will become instrumental in coordinating and achieving a reduction of metals and will be used to prevent water quality impacts in the watershed.

SWQB staff is available to provide any technical assistance such as selection and application of BMPs needed to meet WRAS goals.

The SWQB cooperates with stakeholders in this watershed and encourages the implementation of BMPs. Certain reaches in the Whitewater Creek watershed may be suitable habitat for beaver that face extirpation in other locations.

Beaver activities can bring about a rapid growth of riparian vegetation, change an ephemeral stream into a perennial stream, capture sediment, raise the water table, and reduce flood velocities. SWQB encourages efficient management of livestock and wildlife. Lastly, the SWQB will encourage all landowners in the watershed to consider road issues that may cause impairment of the streams ability to function.

Stakeholders in this process will include SWQB, and other members of the Watershed Restoration Action Strategy such as the Catron County Citizens Group (CCCG), the Gila Monster (GM) group, Gila National Forest (GNF), State Game and Fish (NMSGF), the Town of Glenwood, the Glenwood Fish Hatchery, the New Mexico State Highway Department (NMSHD), the Catron County Road Department and other private landowners. Stakeholder public outreach and involvement in the implementation of this TMDL will be ongoing.

Timeline

The New Mexico Watershed Protection Program (NMED/SWQB 1999), published by the New Mexico Environment Department, describes the dynamics of our attempts to reduce nonpoint source pollution. The following is an anticipated timeline for TMDL implementation in this watershed.

Implementation Action	Year 1	Year 2	Year 3	Year 4	Year 5
Public Outreach and Involvement	X	X	X	X	X
Establish Milestones	X				
Secure Funding	X		X		
Implement Management Measures (BMPs)		X	X		
Monitor BMPs		X	X	X	
Determine BMP Effectiveness				X	X
Re-evaluate Milestones				X	X

Section 319(h) Funding Options

The Watershed Protection Section of the SWQB provides USEPA 319(h) funding to assist in implementation of BMPs to address water quality problems on reaches listed on the 303(d) list or which are located within Category I Watersheds as identified under the Unified Watershed Assessment of the Clean Water Action Plan. These monies are available to all private, for

profit, and nonprofit organizations that are authenticated legal entities, or governmental jurisdictions including: cities, counties, tribal entities, Federal agencies, or agencies of the State. Proposals are submitted by applicants through a request for proposals (RFP) process and require a non-federal match of 40% of the total project cost consisting of funds and/or in-kind services. Further information on funding from the Clean Water Act, Section 319(h) can be found at the New Mexico Environment Department website: <http://www.nmenv.state.nm.us>.

Assurances

New Mexico's Water Quality Act (Act) does authorize the Water Quality Control Commission to "promulgate and publish regulations to prevent or abate water pollution in the state" and to require permits. The Act authorizes a constituent agency to take enforcement action against any person who violates a water quality standard. Several statutory provisions on nuisance law could also be applied to nonpoint source water pollution. The Water Quality Act (NMWQCC 1995a) also states in §74-6-12(a):

The Water Quality Act (this article) does not grant to the commission or to any other entity the power to take away or modify the property rights in water, nor is it the intention of the Water Quality Act to take away or modify such rights.

In addition, the State of New Mexico Surface Water Quality Standards (Sections 20.6.4.6.C and 20.6.4.10.C NMAC) states:

These water quality standards do not grant the Commission or any other entity the power to create, take away or modify property rights in water.

New Mexico policies are in accordance with the federal Clean Water Act §101(g):

It is the policy of Congress that the authority of each State to allocate quantities of water within its jurisdiction shall not be superseded, abrogated or otherwise impaired by this Act. It is the further policy of Congress that nothing in this Act shall be construed to supersede or abrogate rights to quantities of water, which have been established by any State.

Federal agencies shall co-operate with State and local agencies to develop comprehensive solutions to prevent, reduce and eliminate pollution in concert with programs for managing water resources.

New Mexico's Clean Water Action Plan has been developed in a coordinated manner with the State's 303(d) process.

All Category I watersheds identified in New Mexico's Unified Watershed Assessment process are totally coincident with the impaired waters lists for 1996 and 1998 as approved by EPA. The State has given a high priority for funding, assessment, and restoration activities to these watersheds.

The description of legal authorities for regulatory controls/management measures in New Mexico's Water Quality Act does not contain enforceable prohibitions directly applicable to nonpoint sources of pollution. The Act does authorize the Water Quality Control Commission to "promulgate and publish regulations to prevent or abate water pollution in the state" and to require permits. Several statutory provisions on nuisance law could also be applied to nonpoint source water pollution. NMED nonpoint source water quality management utilizes a voluntary approach. The state provides technical support and grant monies for implementation of BMPs and other NPS prevention mechanisms through section 319 of the Clean Water Act. Since portions of this TMDL will be implemented through NPS control mechanisms, the New Mexico Watershed Protection Program will target efforts to this and other watersheds with TMDLs. The Watershed Protection Program coordinates with the Nonpoint Source Taskforce. The Nonpoint Source Taskforce is the New Mexico statewide focus group representing federal and state agencies, local governments, tribes and pueblos, soil and water conservation districts, environmental organizations, industry, and the public. This group meets on a quarterly basis to provide input on the section 319 program process, to disseminate information to other stakeholders and the public regarding nonpoint source issues, to identify complementary programs and sources of funding, and to help review and rank section 319 proposals.

Milestones

Milestones will be used to determine if control actions are being implemented and standards attained. For this TMDL, several milestones will be established which will vary and will be determined by the BMPs implemented. Examples of milestones for metals include:

- increases in wetland areas to filter associated reductions in metals concentrations found in the stream;
- increases in stabilized streambank and enhanced riparian areas to decrease erosion and potential loading of sediment associated with metals into a stream; and
- monitoring within a time frame and continued public outreach effort to educate watershed stakeholders on measures to prevent further water quality exceedances.

Milestones will be coordinated by SWQB staff and will be re-evaluated periodically depending on which BMPs were implemented. Further implementation of this TMDL will be revised based on this reevaluation. As additional information becomes available during the implementation of the TMDL, the targets, load capacity, and allocations may need to be changed. In the event that new data or information shows that changes are warranted, TMDL revisions will be made with assistance of watershed stakeholders. The re-examination process will involve: monitoring pollutant loading, tracking implementation and effectiveness of controls, assessing water quality trends in the waterbody, and re-evaluating the TMDL for attainment of water quality standards. Although specific targets and allocations are identified in the TMDL, the ultimate success of the TMDL is not whether these targets and allocations are met, but whether beneficial uses and water quality standards are achieved.

Public Participation

Public participation was solicited in development of these TMDLs. See Appendix E for flow chart of the public participation process. The draft TMDLs were made available for a 30-day

comment period starting **October 9, 2001**. Response to comments is attached as Appendix F of this document. The draft document notice of availability was extensively advertised via newsletters, email distribution lists, webpage postings (<http://www.nmenv.state.nm.us/>) and press releases to area newspapers.

References Cited

Forest Guardians and Southwest Environmental Center v. Carol Browner, Administrator, US EPA, Civil Action 96-0826 LH/LFG, 1997.

Hovland, Dwight, 1997. "PODZOLIZATION, Soil Formation". U.S.D.I. Bureau of Land Management, Division of Lands, Minerals, and Resource Information

SWQB/NMED. 2001. Quality Assurance Project Plan. Rev No.6. March, 9. Santa Fe, New Mexico

SWQB/NMED. 2000. State of New Mexico Procedures for Assessing Standards Attainment for 303(d) List and 305(b) Report. October. Santa Fe, New Mexico

SWQB/NMED. 1999. Pollutant Source(s) Documentation Protocol. July.

USEPA. 1993. Guidance Specifying Management Measures for Sources of Nonpoint Pollution in Coastal Waters. EPA-840-B-92-002. Washington, D.C.

USGS. 1994. Water Resources Data New Mexico Water Year 1993. Data Report NM-93-1. Albuquerque, NM.

Appendices

Appendix A: Conversion Factor Derivation for Whitewater Creek

Appendix B: Collection Data for the Determination of Measured Loads for Whitewater Creek

Appendix C: 4Q3 Determination for Whitewater Creek

Appendix D: Pollutant Source(s) Documentation Protocol for Whitewater Creek

Appendix E: Public Participation Process Flowchart for Whitewater Creek

Appendix F: Response to Comments for Whitewater Creek

Appendix A: Conversion Factor Derivation for Whitewater Creek

8.34 Conversion Factor Derivation

Million gallons/day x Milligrams/liter x 8.34 = pounds/day

10^6 gallons/day x 3.7854 liters/1-gallon x 10^{-3} gram/liter x 1 pound/454 grams = pounds/day

$10^6 (10^{-3}) (3.7854)/454 = 3785.4/454$

= 8.3379

= **8.34**


Appendix B: Collection Data for the Determination of Measured Loads for Whitewater Creek

Location	Date	Al (ug/l)	Al + MOS(ug/l)
At Glenwood	06/08/1998	50	57.5
At Catwalk	06/08/1998	70	80.5
At Glenwood	06/09/1998	20	23
At Catwalk	06/09/1998	80	92
At Glenwood	06/10/1998	70	80.5
At Catwalk	06/10/1998	90	103.5
At Glenwood	06/11/1998	80	92
At Catwalk	06/11/1998	240	276
At Glenwood	08/10/1998	40	46
At Catwalk	08/10/1998	30	34.5
At Glenwood	08/11/1998	30	34.5
At Catwalk	08/11/1998	20	23
At Catwalk	10/19/1998	10k	10k

k denotes below the detection limit

n=	13	13
# exceed	2	4
% Exceed	15.38%	30.77%

=Geometric
146.9693846 Mean

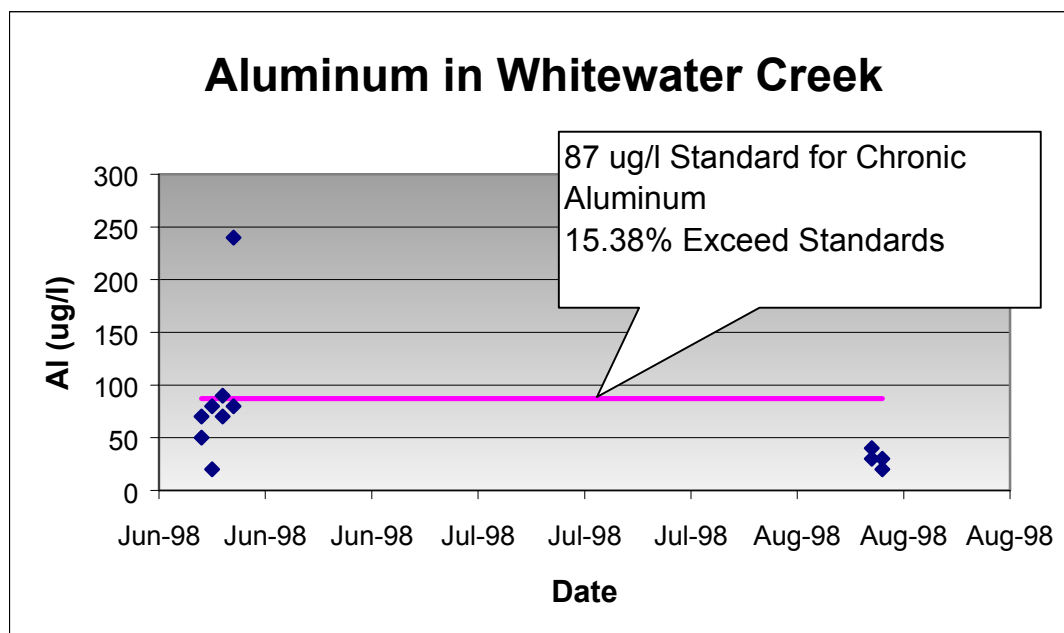

Appendix C: 4Q3 Determination for Whitewater Creek

The regression model developed for mountainous regions above 7,500 feet in New Mexico is as follows:

$$4Q3 = 7.1023 \times 10^{-5} DA^{0.68} P_w^{3.59} S^{1.23}$$

Where;

4Q3 = 4-day, 3-year, low-flow frequency, in cubic feet per second;

DA = drainage area, in square miles; and

P_w = average basin mean winter precipitation 1961-1990, in mm

S = average basin slope

Whitewater Creek:

$P_w = 5487.8$ or 2.16 inches

DA = 54.7

Slope = 0.473

Elevation = 7772

$$0.01 \text{ cfs} = 7.1023 \times 10^{-5} (54.7)^{0.68} (2.16)^{3.59} (0.473)^{1.23}$$

Appendix D: Pollutant Source(s) Documentation Protocol for Whitewater Creek

POLLUTANT SOURCE(S) DOCUMENTATION PROTOCOL



**New Mexico Environment Department
Surface Water Quality Bureau
July 1999**

This protocol was designed to support federal regulations and guidance requiring states to document and include probable source(s) of pollutant(s) in their §303(d) Lists as well as the States §305(b) Report to Congress.

The following procedure should be used when sampling crews are in the field conducting water quality surveys or at any other time field staff are collecting data.

Pollutant Source Documentation Steps:

- 1). Obtain a copy of the most current §303(d) List.
- 2). Obtain copies of the **Field Sheet for Assessing Designated Uses and Nonpoint Sources of Pollution**.
- 3). Obtain digital camera that has time/date photo stamp on it from the Watershed Protection Section.
- 4). Obtain GPS unit and instructions from Neal Schaeffer.
- 5). Identify the reach(s) and probable source(s) of pollutant in the §303(d) List associated with the project that you will be working on.
- 6). Verify if current source(s) listed in the §303(d) List are accurate.
- 7). Check the appropriate box(s) on the field sheet for source(s) of nonsupport and estimate percent contribution of each source.
- 8). Photodocument probable source(s) of pollutant.
- 9). GPS the probable source site.
- 10). Give digital camera to Gary King for him to download and create a working photo file of the sites that were documented.
- 11). Give GPS unit to Neal Schaeffer for downloading and correction factors.
- 12). Enter the data off of the **Field Sheet for Assessing Designated Uses and Nonpoint Sources of Pollution** into the database.
- 13). Create a folder for the administrative files, insert field sheet and photodocumentation into the file.

This information will be used to update §303(d) Lists and the States §305(b) Report to Congress.

FIELD SHEET FOR ASSESSING DESIGNATED USES AND NONPOINT SOURCES OF POLLUTION

CODES FOR USES NOT FULLY SUPPORTED

<input type="checkbox"/>	HQCWF =	HIGH QUALITY COLDWATER FISHERY	<input type="checkbox"/>	DWS =	DOMESTIC WATER SUPPLY
<input type="checkbox"/>	CWF =	COLDWATER FISHERY	<input type="checkbox"/>	PC =	PRIMARY CONTACT
<input type="checkbox"/>	MCWF =	MARGINAL COLDWATER FISHERY	<input type="checkbox"/>	IRR =	IRRIGATION
<input type="checkbox"/>	WWF =	WARMWATER FISHERY	<input type="checkbox"/>	LW =	LIVESTOCK WATERING
<input type="checkbox"/>	LWWF =	LIMITED WARMWATER FISHERY	<input type="checkbox"/>	WH =	WILDLIFE HABITAT

Fish culture, secondary contact and municipal and industrial water supply and storage are also designated in particular stream reaches where these uses are actually being realized. However, no numeric standards apply uniquely to these uses.

REACH NAME:

SEGMENT NUMBER:

BASIN:

PARAMETER:


STAFF MAKING ASSESSMENT:
DATE:

CODES FOR SOURCES OF NONSUPPORT (CHECK ALL THAT APPLY)

<input type="checkbox"/>	0100	INDUSTRIAL POINT SOURCES	<input type="checkbox"/>	4000	URBAN RUNOFF/STORM SEWERS	<input type="checkbox"/>	7400	FLOW REGULATION/MODIFICATION
<input type="checkbox"/>	0200	MUNICIPAL POINT SOURCES	<input type="checkbox"/>	5000	RESOURCES EXTRACTION	<input type="checkbox"/>	7500	BRIDGE CONSTRUCTION
<input type="checkbox"/>	0201	DOMESTIC POINT SOURCES	<input type="checkbox"/>	5100	SURFACE MINING	<input type="checkbox"/>	7600	REMOVAL OF RIPARIAN VEGETATION
						<input type="checkbox"/>	7700	STREAMBANK MODIFICATION OR DESTABILIZATION
<input type="checkbox"/>	0400	COMBINED SEWER OVERFLOWS	<input type="checkbox"/>	5200	SUBSURFACE MINING	<input type="checkbox"/>	7800	DRAINING/FILLING OF WETLANDS
			<input type="checkbox"/>	5300	PLACER MINING			
<input type="checkbox"/>	1000	AGRICULTURE	<input type="checkbox"/>	5400	DREDGE MINING	<input type="checkbox"/>	8000	OTHER
<input type="checkbox"/>	1100	NONIRRIGATED CROP PRODUCTION	<input type="checkbox"/>	5500	PETROLEUM ACTIVITIES	<input type="checkbox"/>	8010	VECTOR CONTROL ACTIVITIES
<input type="checkbox"/>	1200	IRRIGATED CROP PRODUCTION	<input type="checkbox"/>	5501	PIPELINES	<input type="checkbox"/>	8100	ATMOSPHERIC DEPOSITION
<input type="checkbox"/>	1201	IRRIGATED RETURN FLOWS	<input type="checkbox"/>	5600	MILL TAILINGS	<input type="checkbox"/>	8200	WASTE STORAGE/STORAGE TANK LEAKS
<input type="checkbox"/>	1300	SPECIALTY CROP PRODUCTION (e.g., truck farming and orchards)	<input type="checkbox"/>	5700	MINE TAILINGS	<input type="checkbox"/>	8300	ROAD MAINTENANCE or RUNOFF
			<input type="checkbox"/>	5800	ROAD CONSTRUCTION/MAINTENANCE	<input type="checkbox"/>	8400	SPILLS
<input type="checkbox"/>	1400	PASTURELAND	<input type="checkbox"/>	5900	SPILLS	<input type="checkbox"/>	8500	IN-PLACE CONTAMINANTS
<input type="checkbox"/>	1500	RANGELAND				<input type="checkbox"/>	8600	NATURAL
<input type="checkbox"/>	1600	FEEDLOTS - ALL TYPES	<input type="checkbox"/>	6000	LAND DISPOSAL	<input type="checkbox"/>	8700	RECREATIONAL ACTIVITIES
<input type="checkbox"/>	1700	AQUACULTURE	<input type="checkbox"/>	6100	SLUDGE	<input type="checkbox"/>	8701	ROAD/PARKING LOT RUNOFF
<input type="checkbox"/>	1800	ANIMAL HOLDING/MANAGEMENT AREAS	<input type="checkbox"/>	6200	WASTEWATER	<input type="checkbox"/>	8702	OFF-ROAD VEHICLES
<input type="checkbox"/>	1900	MANURE LAGOONS	<input type="checkbox"/>	6300	LANDFILLS	<input type="checkbox"/>	8703	REFUSE DISPOSAL
			<input type="checkbox"/>	6400	INDUSTRIAL LAND TREATMENT	<input type="checkbox"/>	8704	WILDLIFE IMPACTS
<input type="checkbox"/>	2000	SILVICULTURE	<input type="checkbox"/>	6500	ONSITE WASTEWATER SYSTEMS (septic tanks, etc.)	<input type="checkbox"/>	8705	SKI SLOPE RUNOFF
<input type="checkbox"/>	2100	HARVESTING, RESTORATION, RESIDUE MANAGEMENT	<input type="checkbox"/>	6600	HAZARDOUS WASTE	<input type="checkbox"/>	8800	UPSTREAM IMPOUNDMENT
<input type="checkbox"/>	2200	FOREST MANAGEMENT	<input type="checkbox"/>	6700	SEPTAGE DISPOSAL	<input type="checkbox"/>	8900	SALT STORAGE SITES
<input type="checkbox"/>	2300	ROAD CONSTRUCTION or MAINTENANCE	<input type="checkbox"/>	6800	UST LEAKS			
						<input type="checkbox"/>	9000	SOURCE UNKNOWN
<input type="checkbox"/>	3000	CONSTRUCTION	<input type="checkbox"/>	7000	HYDROMODIFICATION			
<input type="checkbox"/>	3100	HIGHWAY/ROAD/BRIDGE	<input type="checkbox"/>	7100	CHANNELIZATION			
<input type="checkbox"/>	3200	LAND DEVELOPMENT	<input type="checkbox"/>	7200	DREDGING			
<input type="checkbox"/>	3201	RESORT DEVELOPMENT	<input type="checkbox"/>	7300	DAM CONSTRUCTION/REPAIR			
<input type="checkbox"/>	3300	HYDROELECTRIC						

Appendix E: Creek

Public Participation Flow Chart for Whitewater

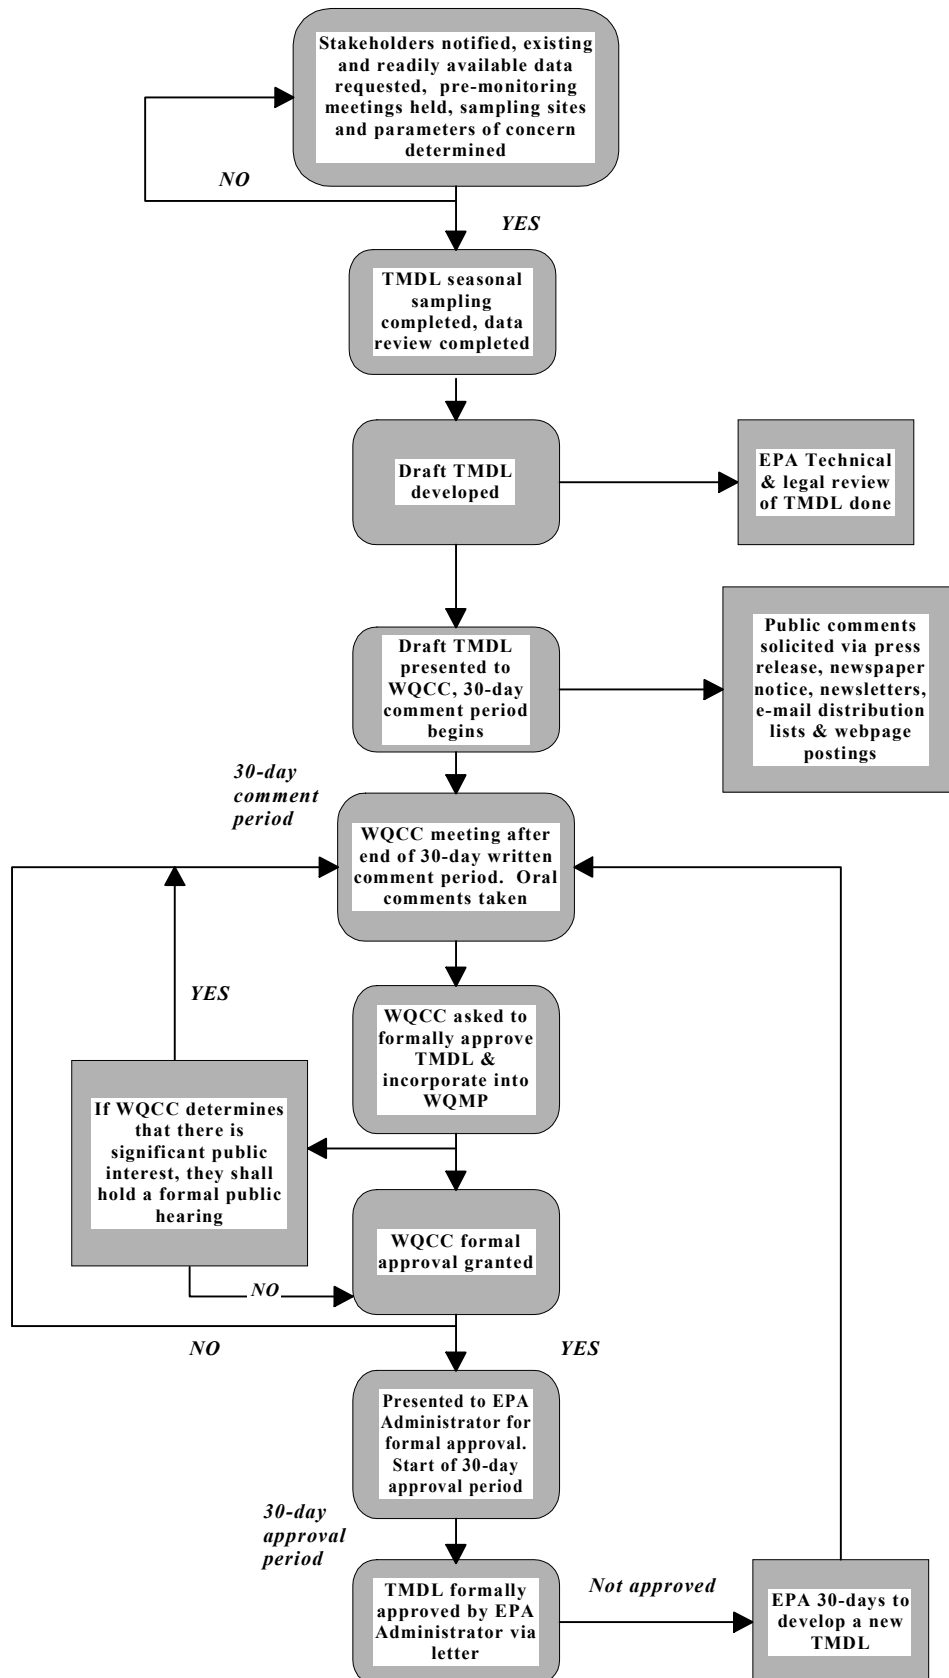

Appendix F: Response to Comments for Whitewater Creek

Comments of TMDL's
Charles Souders
Forest Soil Scientist
Gila National Forest
November 2, 2001

1. Listed Best Management Practices for several TMDL's. In the Glenwood Meeting Howard Hutckisons said that some of the BMP's shown were more for an urban situation rather than a forest situation. I agree. I do think we should show BMP's for grazing, road management, timber (where applicable), and fire. I have a Soil and Water Conservation Practices Handbook that Chic Spann in the Regional Office did several years ago. This might be helpful to you to write more applicable BMP's.

NMED Response

Best Management Practices, or BMPs, are generally tabulated under five commonly used areas for classification. Generally applied agricultural land use headings are: Irrigated Croplands, Non-Irrigated Croplands, Grazing Lands, Animal Waste Management, and Riparian & Wetlands. The Forest Service Handbook (2509.11) and the Soil and Water Conservation Practice Handbook refer to applicable BMPs based on respective agencies' interpretation of a particular "cause". Each agency/group will designate a particular "BMP code" to address a specific "action" that is needed, in response to change in a particular "indicator". In many jurisdictions there exist legislation, policy, rules, regulations and other legal requirements, which take precedence over the referenced Best Management Practices. These must be followed where they exist. However, the SWQB does not imply a "cause" within a TMDL document, nor do they monitor indicator species to effect a "designated BMP" reference. The SWQB is specifically charged with monitoring changes in the water column. Implications of causes can be made only through probable or possible causes in the course of routine water column monitoring. The wide range of BMPs suggested is specifically tailored to suit the watershed, not address a certain "cause" associated with reach specific probable causes. Because SWQB does not monitor terrestrial activities, we cannot infer that a particular "cause" is occurring within the watershed. Changes within the water column imply that certain activities may be occurring. Since all sources of terrestrial inputs to the water column are not monitored, nor implied, the SWQB suggests a wide range of BMPs to address all possible causes of water column changes.

2. Mangus Creek TMDL

A. Cover page. Threatened and Endangered Species. It should say yes. The stream has Loach Minnow and Spikedace, both of which are T&E Species.

NMED Response

The Bureau agrees and the changes have been made.

B. Under Other BMP activities in the Watershed. The forest is doing NEPA on several grazing allotments in the watershed. This should improve grazing management and watershed conditions.

NMED Response

The NEPA process for grazing allotments is a terrestrial activity. Grazing management and watershed conditions are vaguely linked, with the common factor being a comprehensive approach to restoration. Off road vehicle control, non-use road closure, thinning to promote groundcover growth, and an increase in riparian buffer quality, would be an example of a comprehensive approach. It has been demonstrated that elimination of cattle grazing, or ceasing to plant row crops for extended periods, does not initiate a restoration process for the watershed. The SWQB suggests a wide range of BMPs to address conditions to restore the watershed, not to address an “identified cause” by another agency/group.

The burn planned in March and April, 2001 was not completed.

This is the Mangus WQ project (FY01-I), and was delayed due to a delay in funds being released. The project is currently in the inter-agency MOU and private landowner permission process.

2. Sapillo Creek (Turbidity and TOC) On page 2 and 6 of TOC the description of Background Information is not the same as Turbidity page 2 Background Information. I talked with Pete Stewart on this and Lake Roberts was drained and dredged in 1993. He thought that the lake was drained again 4 years ago, (not 6 years ago).

NMED Response

The TMDL information came from Steve at the Las Cruces Game and Fish Department (oversight agency). The dates are not well documented in either the FS or the Game and Fish, due to the incident surrounding the drain. There was an incident where the overflow valve was compromised and lake was accidentally drained.

4. Whitewater Creek cover page. The lower portion of the creek has Loach Minnow T&E Species.

NMED Response

The Bureau agrees and the changes have been made.

Some where in the document it should show that above Whitewater Campground is wilderness. No grazing occurs in the wilderness. Potential treatments in the watershed above the campground is limited.

NMED Response

The SWQB does not differentiate between sample locations on a designated segment. Study plans are generally adhered to, on an “availability of access” basis. Many monitored reaches of those identified segments have only one sample station. Due to the fact that the SWQB only monitors changes in the water column, and attributes probable or possible watershed causes to those changes in the water column, we cannot differentiate between “above and below” a particular sample station. The TMDL is written, and the study plans generated, to characterize a particular reach, of an identified segment, not to characterize a particular sample station. On some reaches, with very slow moving water, water is known to travel upstream due to wind action. The sampling and TMDL generation is, in essence, an averaging approach to characterize a very large segment or reach within a segment. As the number of sample stations gets larger, the water column data can take on more locational specific characteristics. Statistically, the number of stations that would be needed to positively characterize one particular station far exceeds the capabilities of SWQB.

SWQB does not monitor terrestrial activities, and it is assumed that the data collected, regardless of the numbers of stations on a particular segment, is characteristic of the entire water column, for that TMDL reach. The BMPs suggested are pertinent to watershed restoration activities that will promote long term water column quality improvement for the entire segment, not to address “causes” or “limitations” as identified by other agencies/groups.

New Mexico Environment Department
Surface Water Quality Bureau
PO Box 26110
Santa Fe, NM 87502

November 8, 2001

RE: Comments on Proposed TMDL for Chronic Aluminum on Whitewater Creek

To Whom It May Concern;

The following constitute Forest Guardians' comments on the above-named TMDL. We welcome the opportunity to participate in the public decision-making process for an issue as important and crucial to water quality as TMDL development. We hope that our comments are taken into serious consideration as the TMDL moves toward final approval, and we encourage you to continue to keep us informed so that we may continue to be involved in this process.

I. Voluntary Best Management Practices (BMPs)

We contend that voluntary BMP's in the draft implementation plan comply with neither the letter nor the spirit of the Clean Water Act, and will not result in the eventual re-attainment of water quality standards as envisioned by the TMDL process. We therefore urge you to include mandatory BMPs in the final TMDLs in order to assure that water quality standards have a real chance to be attained. We base this comment on the following narrative.

A TMDL consists of a pollutant specific standard and a plan to meet that standard. The standard, or "target load" is the maximum amount of pollution that a river can take from all sources without violating water quality standards. Once this "target load" is established, the TMDL then mandates pollution reductions to the various sources of pollution in a watershed to meet that standard. Pollution reductions are achieved through "load allocations" which set the maximum amount of pollution each source can contribute. These load allocations are referred to as "wasteload allocations" or "WLAs" when applied to point sources and "load allocations" or "LAs" when applied to nonpoint sources. A TMDL, therefore, represents the "sum of the individual WLAs for point sources and LAs for nonpoint sources and natural background." 40 C.F.R. § 130.2(i).

At a minimum, each plan of implementation must include "reasonable assurances" that the WLAs or LAs will, in fact, be implemented and achieved. With respect to WLAs for point sources, such assurances are easily provided by demonstrating how the load allocations will be incorporated into the permit. 40 C.F.R. §130.7(a). In each permit, effluent limitations can be adjusted to ensure that the pollution reductions succeed. With respect to nonpoint sources, providing these assurances is more difficult because there are generally no permits to adjust. Rather, the TMDLs are implemented via BMPs which are incorporated into a state's water quality management plan as outlined in section 303(e) of the CWA. 33 U.S.C. § 1313(e); 40 C.F.R. § 130.7(a).

Once the "target load" and "load allocations" are established, the TMDL process gets underway. The next step is to transform the calculations in the TMDL into real, on-the-ground results--to implement the TMDL. As a last resort measure, Congress mandated that TMDLs

succeed in improving water quality. TMDLs "shall be established at a level necessary to implement the applicable water quality standards with seasonal variations and a margin of safety which takes into account any lack of knowledge." 33 U.S.C. § 1313(d)(1)(C). EPA agrees, stating that "TMDLs shall be established at levels necessary to attain and maintain . . . water quality standards." 40 C.F.R. § 130.7(c)(1). Whether or not a TMDL will improve water quality is therefore the standard for State TMDLs. 33 U.S.C. § 1313(d)(2).

Before approving a TMDL, EPA must ensure that the load allocations will succeed in protecting and improving water quality. 33 U.S.C. §§ 1313(d)(1)(C), 1313(d)(2); 40 C.F.R. 130.7©. If EPA decides to disapprove a TMDL, then it must "establish such loads for such waters as [it] determines necessary to implement the water quality standards". 33 U.S.C. § 1313(d)(2).

"Reasonable assurances" are a required element of a TMDL and/or plan to implement a TMDL. Congress' intent to require reasonable assurances that TMDLs will be implemented to improve water quality is clearly reflected in the plain language of section 303 of the CWA, the legislative history of section 303 of the CWA, and the very purpose of the CWA. This is a reasonable conclusion because it ensures that the goals of the CWA are met.

In drafting the language of section 303 of the CWA, Congress consciously used the word "shall." States "shall" prepare TMDLs, "shall" establish such TMDLs at level necessary to implement water quality standards, "shall" disapprove TMDLs that fail to implement water quality standards, and "shall" have a management plan which includes TMDLs and a provision for "adequate implementation." 33 U.S.C. §§ 1313(d)(1)(C), 1313(e)(1), 1313(e)(3)(C), (F).

However the burden will fall primarily on the polluters to ensure that the BMPs are actually implemented. In NMED's own words from other TMDLs, cooperation from the polluters "will be pivotal in implementation of this TMDL." See Cordova Creek TMDL, 1999. The key word in NMED's plan is "cooperation." The polluters in that TMDL, like here, have the option of doing nothing. They can choose not to get involved-not to undertake the expensive and time consuming burden of implementing the BMPs. There are absolutely no obligations or mandates in the plan requiring polluters to implement the necessary BMPs.

By allowing section 319's voluntary program to be the sole basis for implementing the TMDL, the State is ignoring the "reasonable assurance" requirement. Unlike section 319's voluntary, consensus based approach under the CWA, TMDLs must "implement applicable water quality standards." 33 U.S.C. § 1313(d)(1)(C).

Thus, unlike section 319 plans, TMDLs must provide assurances that pollution reductions will occur and that water quality will be improved. See 33 U.S.C. § 1313(d)(1)(C). The "purely voluntary" plan to implement the TMDL plainly fails to provide such assurances. As such, there clearly are no assurances that this TMDL will be implemented to improve water quality.

The evidence suggesting that "purely voluntary" plans generally do not work is overwhelming. The failure of sections 208 and 319 of the CWA, two voluntary programs to control nonpoint source pollution, provides a good illustration. Unlike the CWA's point source

program, which includes mandatory effluent limitations outlined in federally issued permits, the nonpoint source programs of section 208 and 319 of the CWA are void of any meaningful federal mandates. Both programs are "purely voluntary." They rely on voluntary state planning and implementation, technical assistance, and ineffective financial incentives, rather than mandatory controls, to abate nonpoint source pollution. See 33 U.S.C. §§ 1288(b)(2)(F), 1288(j), 1329(h). The result is predictable.

Today, while point source pollution is at a twenty year low, nonpoint source pollution is out of control. In EPA's own words, nonpoint source pollution remains the Nation's largest source of water quality problems. It's the main reason that approximately 40 percent of surveyed rivers, lakes, and estuaries are not clean enough to meet basic uses such as fishing or swimming. The current nonpoint source pollution problem can be attributed to one factor: State reliance on voluntary compliance.

Under the voluntary schemes of sections 208 and 319 of the CWA, states are opting not to implement nonpoint source controls. States are reluctant to require controls because, as one observer noted, "the expense to states, both in terms of money and the political costs of imposing burdensome regulations on powerful agricultural interests, is potentially significant." See Houck, *supra* footnote 10 at 527. Without a "meaningful federal mandate, the states, with a few . . . exceptions have not implemented polluted runoff programs of their own." *Id.*

Even though EPA is well-aware of this fact, the "protection" Agency is allowing states to use the voluntary, incentive-based program under section 319 of the CWA, without any upgrades, to implement TMDLs. Once again, the results are predictable. A 1998 study of 55 TMDLs approved by EPA, many with voluntary implementation plans, showed a "near-total avoidance of implementation measures." Oliver A. Houck TMDLs IV: The Final Frontier, 29 ELR 10469, 10481 (August, 1999). Today, EPA is aware of hundreds of "purely voluntary" TMDLs that are not being implemented.

Indeed, it was the "purely voluntary" nature of the 1965 Water Quality Act that led to the 1972 amendments and the birth of the TMDL program. See H.R. 11896 at 68, 69, 106, 107, 92nd Cong. (1972); S. Rep. No. 92-414, at 3675 (1972).

Similar congressional concerns over the futility of voluntary measures prompted the 1935 amendments to the Federal Power Act, 16 U.S.C. §§ 797-817, the 1977 and 1990 amendments to the Clean Air Act ("CAA"), 42 U.S.C. §§ 7401-7671q, and the 1990 amendments to the Coastal Zone Management Act, 16 U.S.C. §§ 1451 to 1465 ("CZMA").

As one court noted, the 1935 amendment to the Federal Power Act, "made licensing a mandatory requirement" for all new projects. *Cooley v. F.E.R.C.*, 843 F.2d 1464 (D.C. Cir. 1988) (citing S. Rep. No. 621, 74th Cong., 1st Sess. (1935) and *First Iowa Hydro-Electric Coop. v. FPC*, 328 U.S. 152 (1946)). The earlier, purely voluntary scheme "had proven inadequate for the development of a comprehensive system of water power regulation." *Id.*

In the 1977 amendments to the CAA, Congress again recognized the ineffectiveness of voluntary compliance. As the Sixth Circuit noted, "although some voluntary compliance and

cooperation was achieved under the former version of the [CAA], Congress clearly found the earlier provisions an inadequate answer to the problem of interstate air pollution. *Air Pollution Control Dist. of Jefferson County, Ky. v. U.S.E.P.A.*, 739 F.2d 1071,1091 (6th Cir.1984) (citing H. R. Rep. No. 294, 95th Cong., 1st Sess. 329). The new mandatory CAA provisions, "were intended to establish an effective mechanism for prevention, control, and abatement of interstate air pollution." *Id.* at 1091. In 1990, Congress amended the CAA once again, this time replacing a failing "discretionary" state permitting program with a mandatory federally enforceable permitting scheme. See 42 U.S.C. §§ 7661-7661d.

In addition, in 1990 Congress passed the "Coastal Zone Reauthorization Amendments of 1990" (CZARA), amending the 1972 CZMA, because the earlier program of providing federal grant money for "voluntary" state programs was failing to protect coastal resources from nonpoint source pollution. Under the new approach, participating states are now required to prepare and submit to EPA for approval, a program to protect coastal waters from nonpoint source pollution. 16 U.S.C. § 1455b(a)(1). Before any federal money is dispersed, each state program must, at a minimum, include "enforceable policies and mechanisms to implement" the program. 16 U.S.C. § 1455(d)(16). CZMA defines "enforceable policy" to mean "State policies which are legally binding through constitutional provisions, laws, regulations, land use plans, ordinances, or judicial or administrative decisions, by which a State exerts control over private and public land and water uses and natural resources." 16 U.S.C. § 1453(6a). The existence of an "enforceable policy" provides the requisite assurance that plans will, in fact, be implemented and pollution reductions achieved.

In amending all of these environmental statutes Congress repeatedly and consistently has recognized the futility of "purely voluntary" programs in achieving Congressional goals. Today, a number of states are following Congress' lead by recognizing the need for enforceable policies and abandoning the voluntary approach towards controlling nonpoint source pollution. In Idaho, for instance, the state's water pollution control law imposes an affirmative duty on nonpoint source polluters to implement BMPs in order to meet and implement water quality standards for all waters with TMDLs. See Idaho Code § 39-3618. Failure to implement BMPs in such waters, may result in a civil action from the state agency. See Idaho Code § 39-3622. The enforceable program is working. The TMDLs for Idaho's South Fork of the Salmon River provide a good illustration. These TMDLs, which include mandatory BMPs to minimize sediment inputs from forestry operations (e.g., slope stabilization projects, grass seeding) are succeeding in returning a highly valued Chinook salmon and steelhead population to the once polluted River.

In Maryland, the State's Department of the Environment has the authority to require enforceable permits for certain nonpoint source discharges. See Md. Code. Ann., Envir. § 9-323(b). In addition, all soil and sediment pollution is prohibited, except for agricultural activities conducted in accordance with soil conservation and water quality plans. See Md. Code. Ann., Envir. § 9-322. A violation of these provisions may result in corrective action orders, injunctions, civil penalties, and even criminal prosecution. See Md. Code. Ann., Envir. §§ 9-334, 9-335, 9-338, 9-342, 9-343. Other states such as California, Oregon, Georgia, Vermont, and Wisconsin have adopted similar, enforceable approaches towards remedying nonpoint source pollution problems.

As described above, there is an overwhelming amount of evidence suggesting that "purely voluntary" measures are generally ineffective and unreliable. As such, a purely voluntary plan of implementation clearly does not belong in the TMDL. As a last resort measure there must be "reasonable assurances" that all TMDLs will be implemented to improve water quality and, voluntary plans, by themselves, fail to provide such assurances. In fact, NMED even concedes in other TMDLs that even with implementation of numerous BMPs, the waterway at issue may not be able to meet water quality standards.

Therefore, this purely voluntary approach does not belong in this TMDL because, unlike other clean up programs under the CWA, a TMDL comes with a mandate—there must be "reasonable assurances" that the TMDL will be implemented and will improve water quality. We urge the State to adopt measures similar to the ones outlined above and adopted by other States that are effective. We also urge NMED to pressure the Water Quality Control Commission to "promulgate and publish regulations to prevent or abate water pollution in the state" as authorized by New Mexico's Water Quality Act. This authority is listed as an "Assurance" in the TMDL, and we feel is much more likely to reasonably assure that the TMDL actually leads to the attainment of WQS.

II. Impacts of Grazing

Very little, if any, of the discussion in the permit concerning sources of non-attainment includes a reference to grazing activities on the watershed and their devastating impact on water quality. To the contrary, grazing is primarily mentioned in the section entitled "Other BMP Activities in the Watershed".

This section refers to "...the Forest Service and private landowners *actively* manage grazing activities..." (emphasis added). The proposed TMDL is written in reliance on this statement—that the entities involved with grazing are actively managing their activities. Our experience with monitoring grazing allotments on Forest Service lands leads to the complete opposite conclusion: that the entities involved with grazing on Forest service lands are not actively managing their allotments, and are in fact not complying with their management plans, if they have a current one. This is not merely a theory of ours either, as we have filed several lawsuits on the recent past concerning this exact issue in an attempt to force the Forest Service and the allotment holders to comply with their management plans and protect natural resources, including riparian areas and their waterways.

By not addressing impacts of grazing in the TMDL and at the very least developing BMPs to account for the potentially devastating effects of grazing on water quality, we believe the proposed TMDL is deficient and will not effectively reach its goals. Unless *all* sources of non-point source pollution are addressed in a TMDL, the waterway will continue to be impaired and in need of scarce monetary and physical resources in order to restore it to its proper condition, and the Clean Water Act's goals will never be realized.

III. Impacts of Water Diversions and Their Maintenance

Again, there is very little to no mention of the impacts of water diversions on this waterway and how they may adversely impact water quality. Thus, there are no strategies which address this source of pollution and no mitigative measures; therefore we seriously doubt that if this water is actually impacted by diversions, it will be able to improve and re-attain water quality standards as required by the Clean Water act.

IV. Impacts of Roads and Road Maintenance Activities

There is similarly very little discussion of roads and their potential or real impacts on the waterway and those effects are not addressed in the BMPs. Again, we question how NMED can seriously attempt to bring this water back into attainment of standards if *all* of the pollution sources are not properly accounted for.

V. Milestones and Measures of Success

In the TMDL, there are a number of “Milestones” and “Measures of Success” listed, presumably as a means of assessing whether the TMDL process is working towards the goal of restoration. Unfortunately, nowhere in these assessment protocols can we find a reference to aquatic species’ health and rerstoration of native species to their habitats listed as a measure of success or productivity towards goals. This is inexcusable when one considers the deleterious effects of pollutants on aquatic species, especially the harm caused by severe algal blooms like the ones found on this waterway. How can NMED be serious about restoration and de-listing if you do not consider progress in the health of the ecosystem, measured by aquatic species, when you are looking down the road to check to see if your TMDL is serving it’s purpose. We seriously doubt that any real progress will be made if aquatic species’ health is not given primary consideration.

Restoration, including stocking of native species is not under the jurisdiction of the SWQB. However, in the Milestones section of the TMDLs, the SWQB states that milestones will be re-evaluated, and this process will involve re-evaluating the TMDL for attainment of water quality standards. Although specific targets and allocations are identified in the TMDL, the ultimate success of the TMDL is not whether these targets and allocations are met, but whether the beneficial uses and water quality standards are achieved.

The SWQB utilizes the biological data assessment protocols in the most recent EPA-approved Quality Assurance Project Plan for Water Quality Management Programs (QAPP) to determine any level of biological impairment in streams around the state.

These protocols are derived from the EPA-developed rapid assessment protocols for benthic macroinvertebrates and fisheries sampling and analyses.

Several of the SWQB protocols developed (i.e. stream bottom deposits and plant nutrients) involve directly measuring impacts to the aquatic community (including macroinvertebrates and fisheries) for specific pollutants in order to determine whether designated uses and standards are/not being met.

The Nutrient Assessment Protocol developed by the SWQB involves gathering existing data on aquatic communities for the reach being assessed. Often, if there is not current information on the aquatic community, the SWQB will conduct rapid bioassessment protocols for fish and/or macroinvertebrates to gather recent data. The findings are then included in the TMDL document under linkage of water quality and pollutant sources, and also in the reach specific assessment forms for each reach sampled in the State. Assessment for aquatic life impairment is done for TMDL listed streams, and/or streams that is not currently listed as impaired as part of our overall watershed monitoring strategy.

VI. Conclusion

We feel that this TMDL, as written, will not lead to a re-attainment of water quality standards in a timely and efficient manner, if at all. Our biggest concern is with the implementation of voluntary BMPs, which we fear will result in non-implementation. History shows that voluntary BMPs and similar measures rarely result in on the ground implementation, and that mandatory measures are the correct steps to take if the State is serious about cleaning up New Mexico's imperiled waters. We also find that the lack of thorough analysis and resultant paucity of corrective measures to address the adverse impacts of water diversions, grazing, and roads on this water is not in line with the Clean Water Act's goals and objectives. Also, since there are no point sources located within this watershed, it should be relatively straightforward to focus on the non-point sources as a means of restoring the health of the water. This primarily means that grazing and its deleterious effects need to be better addressed through the TMDL process or we are sure that the water will never be restored.

NMED Response

For every TMDL written by the SWQB, the TMDL identifies all potential sources of impairment (as listed on the cover page of every TMDL). As well, there is a discussion of the linkage of water quality and pollutant sources in every TMDL. Sources of impairment are from the best professional judgment of SWQB staff conducting the sampling effort and TMDL development. The Pollutant Source Documentation Protocol is utilized in the field, and included in TMDLs to identify the probable source of the pollutant. This protocol involves photo documentation of potential sources for each stream reach, and can be found with the source identification field sheet in the TMDL document, and in our administrative files.

We hope that when the final TMDL is written, you will reconsider this draft and remedy the problems that we have outlined above. Nothing less than the future of New Mexico's imperiled waters is at stake, and this resource is too important to not re-evaluate this potentially high impact document. Thank you for your consideration, and please contact us if you have any questions or concerns with our comments.

Sincerely,

Scott C. Cameron
Clean Water Coordinator
Forest Guardians

NMED Response

Several comments were received from the Forest Guardians. The following are responses by the SWQB to the Forest Guardians comments on the draft TMDL.

The SWQB would like to thank the Forest Guardians for their comments on this TMDL document. Presently, there is no requirement under the federal Clean Water Act for reasonable assurances for implementation of nonpoint source TMDLs. As stated in existing guidance (Guidance for Water Quality-Based Decisions: The TMDL Process, EPA 440/4-91-001, April 1991) implementation of nonpoint source TMDLs is through voluntary programs, such as section 319 of the Clean Water Act. According to the proposed regulations for TMDLs (40CFR part 130.2[p]), site-specific or watershed-specific voluntary actions are mechanisms which may provide reasonable assurances for nonpoint sources. The SWQB has implemented TMDLs statewide through a strong Watershed Protection Program. This program will continue to provide for the implementation of nonpoint source TMDLs.

Pursuant to Section (e)1 of the Clean Water Act (CWA), the Surface Water Quality Bureau (SWQB) has established appropriate monitoring methods to evaluate the effectiveness of controls or Best Management (BMP) activities. In order to optimize the efficiency of this monitoring effort, the SWQB has adopted a rotating basin monitoring strategy. This strategy is based on a 5-7 year return interval, and provides improved coordination and monitoring of BMP effectiveness.

Implementation plans are included in every TMDL in New Mexico. As stated in the TMDL document, this is a general implementation plan for activities to be established in the watershed. The SWQB will further develop the details of the plan with the help and cooperation of the stakeholders and other interested parties in the watershed. Detailed watershed management plans that include specific best management practices (BMPs) should be developed by and for watershed stakeholders. In this watershed, public awareness and involvement will be crucial to the successful implementation of this plan and improved water quality. Staff from the SWQB will work with stakeholders to provide the guidance in developing the Watershed Restoration Action Strategy (WRAS). The WRAS is a written plan intended to provide a long-range vision for various activities and management of resources in a watershed. It includes opportunities for private landowners and public agencies to reduce and prevent impacts to water quality. This long-range strategy will become instrumental in coordination, reducing, and preventing further water quality impacts in the watershed. SWQB staff assists with technical assistance such as the selection and application of BMPs needed to meet WRAS goals.

The watershed management plans would include any specific BMPs for activities, such as grazing or road runoff and maintenance, that are identified as contributing to the water quality impairment. It is not the intention of the SWQB to provide an all inclusive watershed management plan in the TMDL documents. In order to obtain reasonable assurances for implementation in watersheds with multiple landowners including Federal, State, and private land, the SWQB has established Memoranda of Understanding (MOUs) with various Federal and State agencies. These MOUs provide for co-ordination and consistency in dealing with Nonpoint source issues.

Milestones are also used in the implementation plans in the TMDL documents to determine if BMPs are implemented and standards attained.

The SWQB does not regulate water quantity issues for the State of New Mexico. All inquiries related to water rights should be directed to the Office of the New Mexico State Engineer. The SWQB programs include a focus on upland source controls, not instream flow, in the form of BMPs to protect and improve water quality statewide.